



## CONSOLES WITH SLOPING TOP MODEL QMB

Control console in AISI 304 stainless steel (Wnr 1.4301) with 70° sloping top and gas struts. Lower section with hinged door. Reversible lower door. Fixed rear panel. A divider separates the top and the lower sections. Each section comes with an internal mounting plate in 25/10 FeZn. IP 65 / IP 55 protection rating (according to dimensions).

### TECHNICAL DESCRIPTION


<b>Type of steel:</b> AISI 304 (Wnr 1.4301) Scotch-brite
<b>Thickness:</b> 1.5 mm (0.06")
<b>Door:</b> solid
<b>Door fixing:</b> hinges
<b>Bottom door opening:</b> 120°
<b>Gasket:</b> polyurethane
<b>Internal mounting plate:</b> included, in FeZn 25/10
<b>Closing system:</b> 5 mm (0.20") chromed Zamak lock with double bit insert
<b>Bottom:</b> plain cable gland plate
<b>Rear door:</b> over W ≥ 1000 mm (39.37")
<b>Sloping top:</b> 90° opening
<b>Inclination angle:</b> 70°
<b>Sloping top fixing:</b> hinges

### CUSTOMIZATION POSSIBILITIES

Dimensions: adaptable on request*
Thickness: adaptable on request*
Material: AISI 316L (Wnr 1.4404)
Finishes: SN Coarse brushed
Gasket: silicone*
* Check when placing order

### ON REQUEST

stainless steel internal mounting plate
plinth

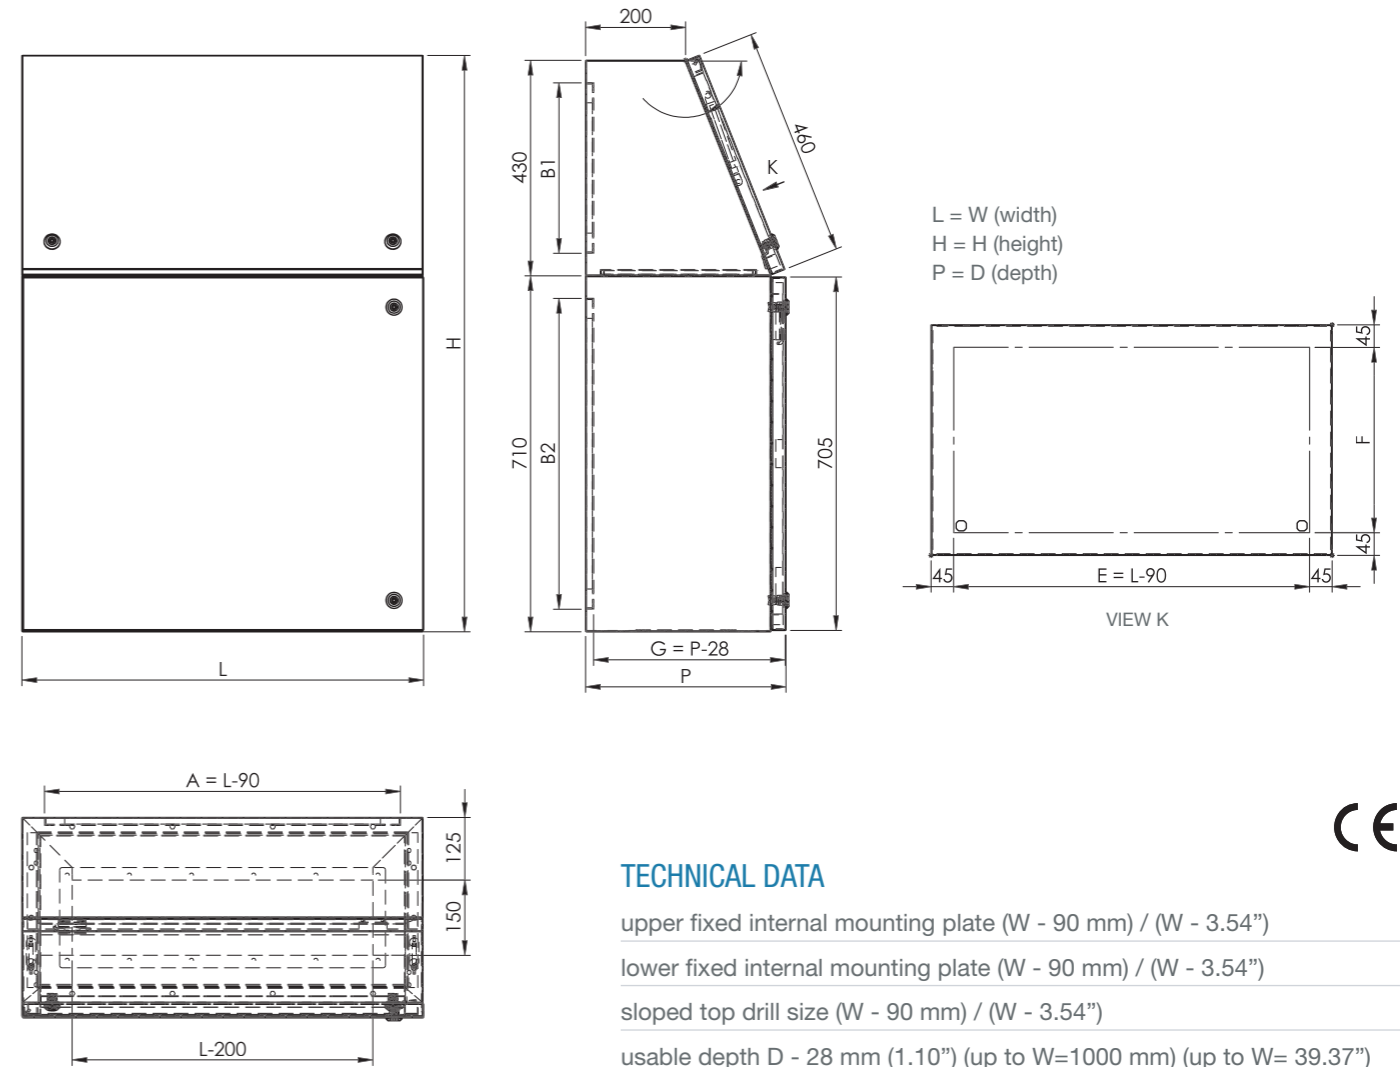

### TECHNICAL DATA

upper fixed internal mounting plate (W - 90 mm) / (W - 3.54")
lower fixed internal mounting plate (W - 90 mm) / (W - 3.54")
sloping top drill size (W - 90 mm) / (W - 3.54")
usable depth D - 28 mm (1.10") (up to W=1000 mm) (up to W= 39.37")
lower door opening: 120°
sloping top opening angle

Model	Code	No. doors of lower section	External dimensions						Kg	m³	No. hinges	Upper internal mounting plate dimensions				Lower internal mounting plate dimensions				Sloping top drill size				Usable depth			Certification			Model
			W		H		D					A		B1		A		B2		E		F		G			IP 65 IK 10	UL type 1,12,4,4x	EX 3D 3G	
			mm	in.	mm	in.	mm	in.				mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.					
QMB 604	013420010	1	600	23.62	1140	44.88	400	15.75	58,5	0,34	2	510	20.08	340	13.39	510	20.08	620	24.41	510	20.08	370	14.57	372	14.65	√			QMB 604	
QMB 804	013420020	1	800	31.50	1140	44.88	400	15.75	77,5	0,45	2	710	27.95	340	13.39	710	27.95	620	24.41	710	27.95	370	14.57	372	14.65	√			QMB 804	
QMB 1004	013420040	1	1000	39.37	1140	44.88	400	15.75	96,4	0,56	2	910	35.83	340	13.39	910	35.83	620	24.41	910	35.83	370	14.57	372	14.65	√			QMB 1004	
QMB 1204	013420060	2	1200	47.24	1140	44.88	400	15.75	115,4	0,67	2 per door	1100	43.31	1020	40.16	From QMB1204 Single adjustable internal mounting plate	1110	43.70	365	14.37	348	13.70	√			QMB 1204				
QMB 1404	013420080	2	1400	55.12	1140	44.88	400	15.75	134,3	0,78	2 per door	1300	51.18	1020	40.16		1310	51.57	365	14.37	348	13.70	√			QMB 1404				
QMB 1604	013420100	2	1600	62.99	1140	44.88	400	15.75	153,3	0,89	2 per door	1500	59.06	1020	40.16		1510	59.45	365	14.37	348	13.70	√			QMB 1604				
QMB 1804	013420120	2	1800	70.87	1140	44.88	400	15.75	172,2	1,00	2 per door	1700	66.93	1020	40.16		1710	67.32	365	14.37	348	13.70	√			QMB 1804				
QMB 2004	013420140	2	2000	78.74	1140	44.88	400	15.75	191,2	1,11	2 per door	1900	74.80	1020	40.16		1910	75.20	365	14.37	348	13.70	√			QMB 2004				